


SAHO.66-I



This series of products has been designed with standard through-hole diameters based on the cable diameter and copper bar width, ensuring excellent interchangeability. The high-quality high-permeability material used in this product achieves a precision level of 0.2S. The material selected for the winding current-carrying capacity meets relevant international standards such as IE, and the secondary winding has low heat generation, significantly extending the product's service life.

DIMENSIONS

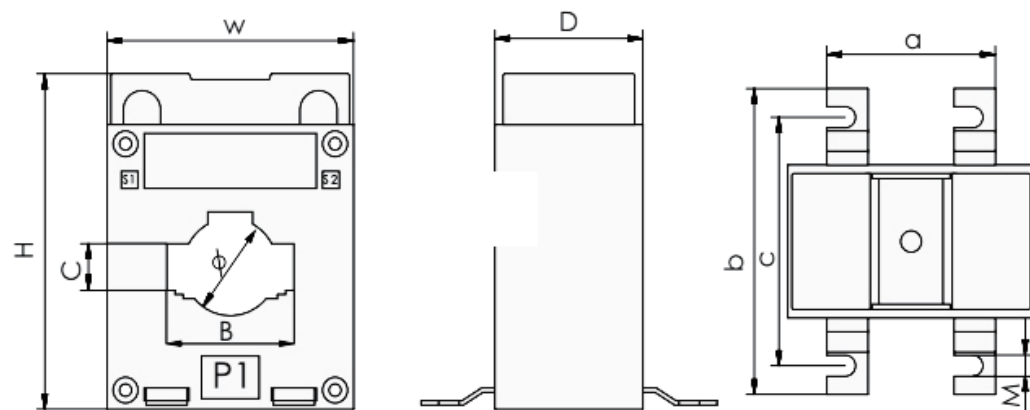

Model #	Dimension						Installation			
	W	H	D	φ	B	C	a	b	c	M
SAH0.66-30I	60	79	36	23	31	11	42	72.5	59	5
SAH0.66-40I	75	98	44	31.5	42.5	12	55	72.5	59	5
SAH0.66-50I	84	98	44	37	52	17	54	72.5	59	5
SAH0.66-60I	101	126	45	45	62	21	61	72.5	59	5
SAH0.66-80I	117	118	45	52	81	11	61	72.5	59	5
SAH0.66-100I	143	153	45	62	100	32	91	72.5	59	5

TECHNICAL PARAMETERS

[illegible]